




6721W

MINI HANDSFREE MONITOR, SBTOP

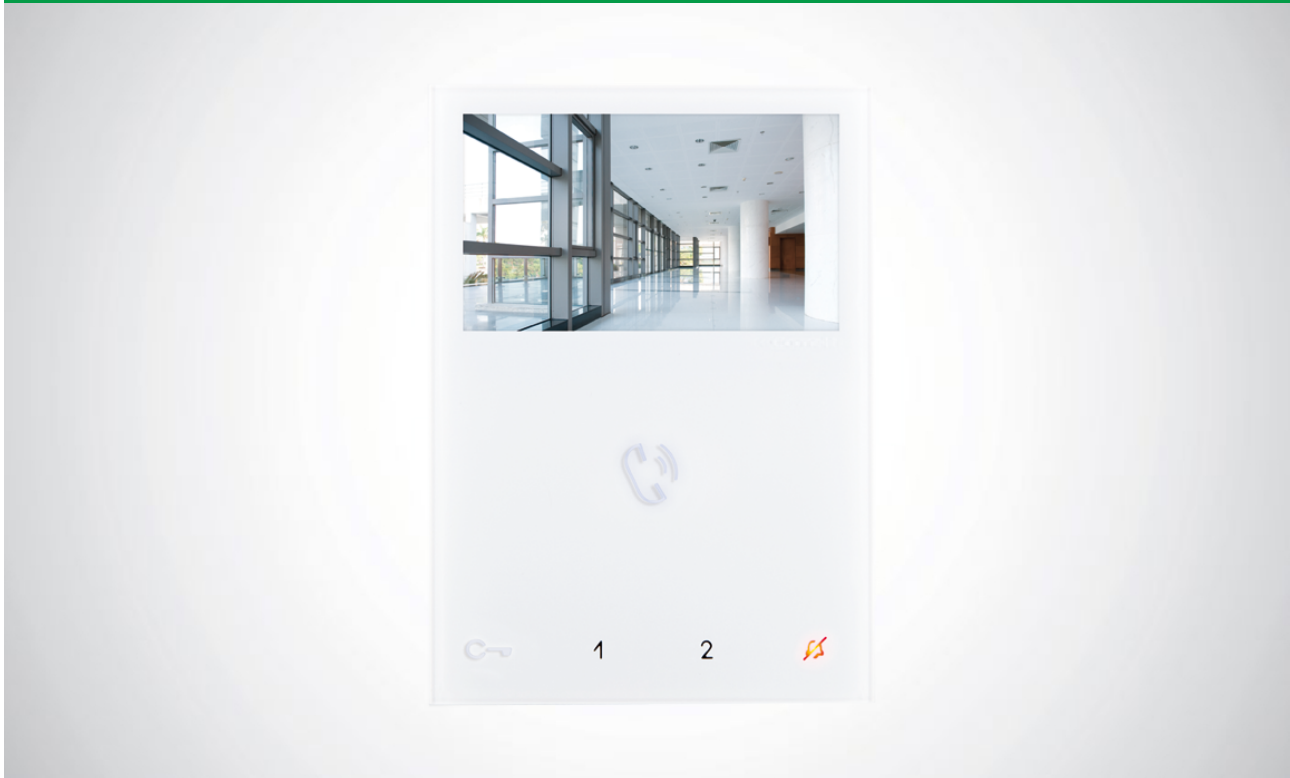

Wall-mounted hands-free monitor with full-duplex audio and 4.3" / 16:9 colour screen. Allows brightness control, plus adjustment of the ringtone volume, which can be customised by choosing one of several different melodies. Equipped as standard with 5 sensitive touch back-lit controls for audio activation, door-opening, self-ignition, switchboard call, privacy service and LED signalling for the door status. Manages floor door calls as standard. Option of adding 3 additional buttons with accessory Art. 6734W. Complete with 2 x 8-position DIP-SWITCH for user code programming and button programming. The wall-mounting or residential series box backplate and riser distribution terminal Art. 1214/2C are included. The monitor can only be used in 2-wire SimplebusTop systems. Dimensions: 115x160x22mm.

AWARDS





6721W

MINI HANDSFREE MONITOR, SBTOP

MAIN FEATURES

Wall-mounted:	Yes
Desk base-mounted:	Yes
Hands-free function:	Yes
Type of display:	LCD
Display size (inch):	4,3" 16:9
Display resolution HxV (mm):	480x272
B/W or colour display:	Color
Product colour:	White
Sensitive Touch technology:	Yes
Total buttons:	5
Additional buttons:	3
LED signaling (no.):	3

FUNCTIONS

Actuator control function:	Yes
Self-ignition:	Yes
Switchboard call function:	Yes
Priority calls:	Yes
Intercom function:	Yes
Selective intercom call:	Yes
Call to multiple addresses:	Yes
Privacy function:	Yes
Doctor:	Yes
Floor door call function:	Yes
Electronic bell:	Yes
Customisable ringtone:	Yes
Privacy conversation function:	Yes
Key button function:	Yes

HARDWARE SPECIFICATIONS

Removable terminals:	Yes
----------------------	-----

SETTINGS

Loudspeaker volume control:	Yes
Microphone volume control:	Yes
Ringtone volume control:	Yes
Display brightness control:	Yes
Display contrast control:	Yes



6721W

MINI HANDSFREE MONITOR, SBTOP

SETTINGS

Display colour control: Yes

GENERAL DATA

Product height (mm): 160

Product width (mm): 115

Product depth (mm): 22

COMPATIBILITY

Simplebus Top audio/video system: Yes

Building Kit audio/video system: Yes

Kit audio/video system: Yes

TECHNICAL CHARACTERISTICS

Power supply voltage: 22 ÷ 28

Minimum current absorption (mA): 2

Maximum current absorption (mA): 325

Loudspeaker: 36mm 400hm 1W

IP protection rating: IP30

Operating temperature (°C): 5 ÷ 40

RH max operating humidity (%): 25 ÷ 75

Video encoding: PAL/NTSC

Product weight (g): 535,24

Clamps: L L CFP1 CFP2



6721W

MINI HANDSFREE MONITOR, SBTOP

ACCESSORIES



6711WV

ADAPTER PLATE FOR MINI HANDSFREE


Adapter plate to finish the installation of the Mini Handsfree monitor in case of replacement of flush-mounted or wall-mounted Planux, Smart and Icona monitors. White color. Dimensions: 170x220x3 mm.



6710

BACKPLATE AND DISTRIBUTION TERMINAL FOR MINI MONITOR

Wall-mounting or residential series box backplate for MINI monitor, /BM versions with handset featuring magnetic induction for hearing aid wearers. Also includes riser distribution terminal Art. 1214/2C. Dimensions 145x100x4 mm.



6734W

ADD. BUTTONS KIT HANDS-FREE MINI MONITOR, WHITE

Accessory for conversion of the monitors of the Mini series Art 6721W and 6721W/BM into 8-button versions. Includes an 8-button faceplate and an electronic module for button activation, which can be installed quickly without the need to open the monitor casing.



6720

BRCKT FOR ROUTING EXT. CABLES. HANDSFREE MINI

Wall support bracket for handsfree Mini monitor allowing thru-routing of external cables. Dimensions:106.3x149.60x19mm.



6720V

Bracket for routing Mini HF VIP external cables

Wall bracket for ViP system hands-free Mini monitor; allows through-routing of external cables.



6732A

DESK BASE FOR HANDS-FREE MINI MONITOR. SBTOP

Desk base installation accessory for hands-free Mini monitor in Simplebus Top system.



6721W

MINI HANDSFREE MONITOR, SBTOP

ACCESSORIES



6732V

DESK BASE FOR MINI HF MONITOR. VIP

Desk base for desktop conversion of ViP system hands-free Mini monitor. Complete with 1x 2 metre cable with RJ45 connector to connect monitor terminals to the coupler or residential series socket.