




1112

TRANSFORMER TX/30D 230V / 12-24VAC 30VA

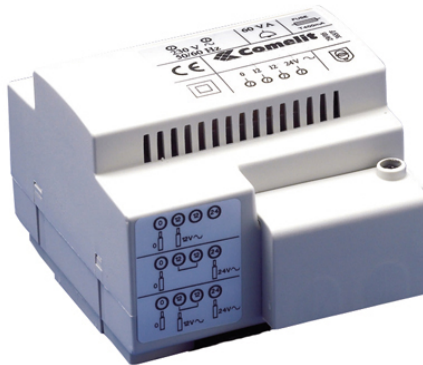

Transformer with 230V primary winding, 0-12-24V / 30 VA secondary winding for intermittent use on 24 V output. Dimensions: 87,5x100x65 mm (5 DIN modules).



1112

TRANSFORMER TX/30D 230V / 12-24VAC 30VA

MAIN FEATURES

Applicable to DIN rail:	Yes
Number of DIN modules:	4

GENERAL DATA

Product height (mm):	90
Product width (mm):	71,7
Product depth (mm):	62
Operating temperature (°C):	30 ÷

COMPATIBILITY

Simplebus Top audio/video system:	Yes
Simplebus 2 audio system:	Yes
Traditional system:	Yes
Simplified system:	Yes
Comelbus system:	Yes
Comtel system:	Yes

MOUNTING/INSTALLATION

Wall-mounted:	Yes
---------------	-----

AUDIO/VIDEO FEATURES

Audio system:	Yes
Audio/video system:	Yes

CONNECTIVITY

Stabilised output:	No
--------------------	----

ELECTRICAL SPECIFICATIONS

Switching power supply:	No
Alternating voltage output A (VAC):	12
Alternating voltage output B (VAC):	24
Maximum current absorption (mA):	180
Maximum power delivered (W):	30