




1210

2-WIRE POWER SUPPLY UNIT REQUIRED TO POWER THE EXTERNAL UNIT

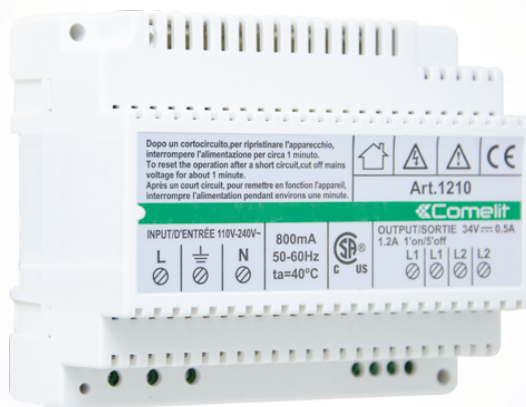

2-wire power supply unit required to power the external unit (terminals L1 - L1) and the support column (terminals L2 - L2). Equipped with 1 terminal for line termination art 1216. Input voltage 110-240Vac. Compatible with audio/video unit art. 4681 and 1621VC and audio unit art. 1621. Dimensions: 106x89x62mm (6 DIN modules).


1210
2-WIRE POWER SUPPLY UNIT REQUIRED TO POWER THE EXTERNAL UNIT
MAIN FEATURES

Alternating input voltage (VAC):	110÷240
Output voltage (VDC):	34
Plug-in power supply unit:	No
Applicable to DIN rail:	Yes
Number of DIN modules:	6
Max. current delivered (A):	1,20

GENERAL DATA

Product height (mm):	108
Product width (mm):	90
Product depth (mm):	62
Operating temperature (°C):	40 ÷

COMPATIBILITY

Building Kit audio/video system:	Yes
Simplebus 2 audio system:	Yes

MOUNTING/INSTALLATION

Wall-mounted:	No
---------------	----

AUDIO/VIDEO FEATURES

Audio system:	No
Audio/video system:	Yes

CONNECTIVITY

Stabilised output:	No
Parallelable power supply outputs:	No

ELECTRICAL SPECIFICATIONS

Switching power supply:	No
Maximum current absorption (mA):	800,00
Maximum power delivered (W):	40