




1595

33VDC POWER SUPPLY UNIT FOR IKALL ENTRANCE PANEL

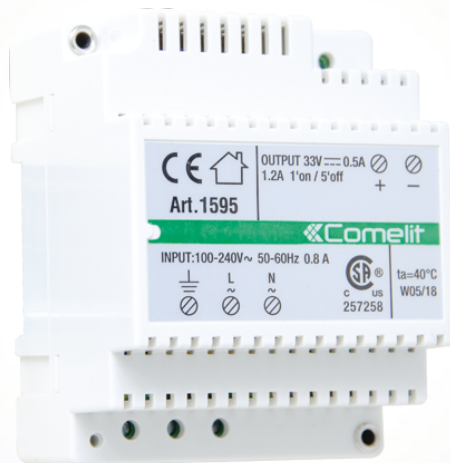

Power supply unit with 110-230VAC primary and 33VDC/500 mA continuous output, and 1.2A inrush current for external unit with IKALL entrance panel. Equipped with internal protection against overcurrent and short circuits. Dimensions: 71.7x90x62 mm (4 DIN modules).


1595

33VDC POWER SUPPLY UNIT FOR IKALL ENTRANCE PANEL

MAIN FEATURES

Alternating input voltage (VAC):	120÷230
Output voltage (VDC):	33
Applicable to DIN rail:	Yes
Number of DIN modules:	4
Max. current delivered (A):	1,2

GENERAL DATA

Product height (mm):	62
Product width (mm):	71,7
Product depth (mm):	90
Type of finish:	Plastic
Product colour:	White
Operating temperature (°C):	-20 ÷ 40

COMPATIBILITY

Simplebus Top audio/video system:	Yes
Building Kit audio/video system:	Yes
Simplebus 2 audio system:	Yes
Simplebus 1 audio system:	Yes
Vip system:	Yes
Kit audio/video system:	Yes

ELECTRICAL SPECIFICATIONS

Maximum power delivered (W):	60
------------------------------	----