

# VTH1520AH IP Indoor Monitor



## **Technical Specification**

Model	VTH1520AH
System	
Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS
Video	
Video Compression	H.264
Audio	
Audio Compression	G.711
Audio Input	All-direction Microphone
Audio Output	Built-in Loudspeaker
Bidirectional Talk	Support Dual-way Bidirectional talk
Display	
LCD Screen	7" 800x480, Resisitive
Operation Mode	
Input	Mechanical buttons
Interface	
Alarm In	8
Alarm Out	-
RS485	-
Network	
Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP
General	
Memory Slot	Embedded 4GB

### Features


- 7" TFT Resistive touch screen
- $\cdot$  IPC surveillance
- $\cdot$  Alarm integration
- $\cdot$  4GB SD card embedded
- · Record & Snapshot


Installation	Flush
Power	DC 12V/ supply directly by VTNS1060A
Power Consumption	Standby ≤1.5W, Work ≤7W
Working Temperature	-10°C~+55°C
Relative Humidity	10%~90%RH
Dimensions	261.0mm×192.0mm×24.1mm
Weight	0.8Kg

# VTH1520AH


### Dimensions

**View Area** 





## Application

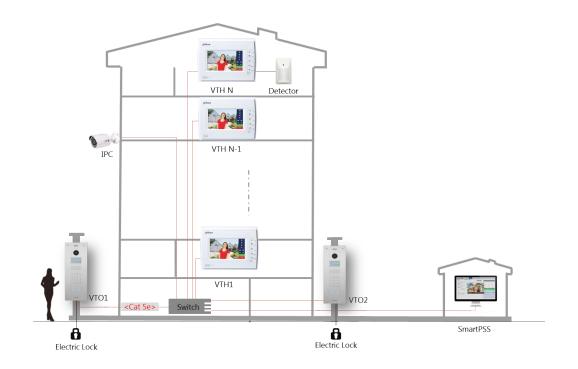



Rev 001.001 © 2016 Dahua . All rights reserved. Design and specifications are subject to change without notice