

# DHI-VTH2521G

## IP Indoor Monitor



- 7" TFT Capacitive touch screen
- Unlock the door
- Set DND period
- IPC surveillance
- 6-channel alarm input and 1-channel alarm output.
- Support standard PoE



### Technical Specification

#### System

Main Processor	Embedded processor
Operating System	Embedded Linux operating system
Network Protocol	SIP; IPv4; RTSP; RTP; TCP; UDP

#### Basic

Screen Type	Capacitive Screen
Display	7" TFT display
Resolution	1024 (H) × 600 (V)
Audio Compression	G.711A; G.711U; PCM
Audio Input	1
Audio Output	Built-in speaker
Audio Mode	Two-way voice call
Audio Enhancement	Echo suppression; digital noise reduction (select as needed)
Audio Bit Rate	16 KHz, 16 Bit

#### Function

Information Release	Receive and view the published information from the management center
DND Mode	Set DND period
Extension Quantity	Villa: 9 extensions Apartment: 4 extensions

#### Performance

Casing	PC + ABS
--------	----------

#### Port

Alarm Input	6
Alarm Output	1
Door Bell	Yes (use the alarm input port)
Network	1 RJ-45

#### Alarm

SOS	Yes
-----	-----


#### General

Color	Black with silver frame
Power Supply	Standard PoE, 12V DC 1A
Power Adapter	Optional
Installation	Surface Mount
Accessory	Bracket and alarm ribbon cable (included)
Dimensions	134.6 mm × 189.6 mm × 26.0 mm (5.30" × 7.46" × 1.02")
Operating Temperature	-10°C to +55°C(+14°F to +131°F)
Operating Humidity	10%–95%RH
Power Consumption	≤ 4W (standby); ≤ 6W (working)
Net Weight	0.35 kg (0.77 lb)
Gross Weight	0.55 kg (1.21 lb)

### Ordering Information

Type	Model	Description
IP Indoor Monitor	DHI-VTH2521G	IP Indoor Monitor

Dimensions (mm[inch])

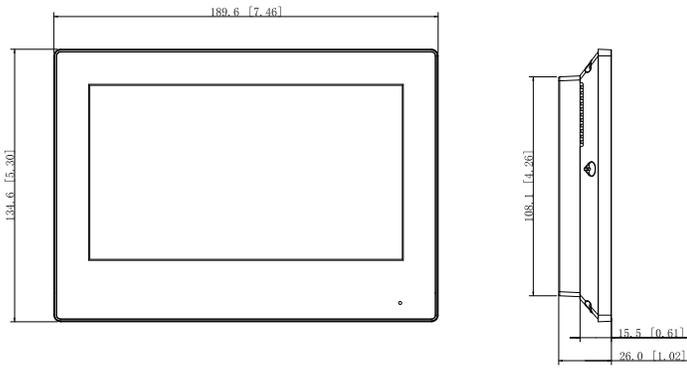

Application

